
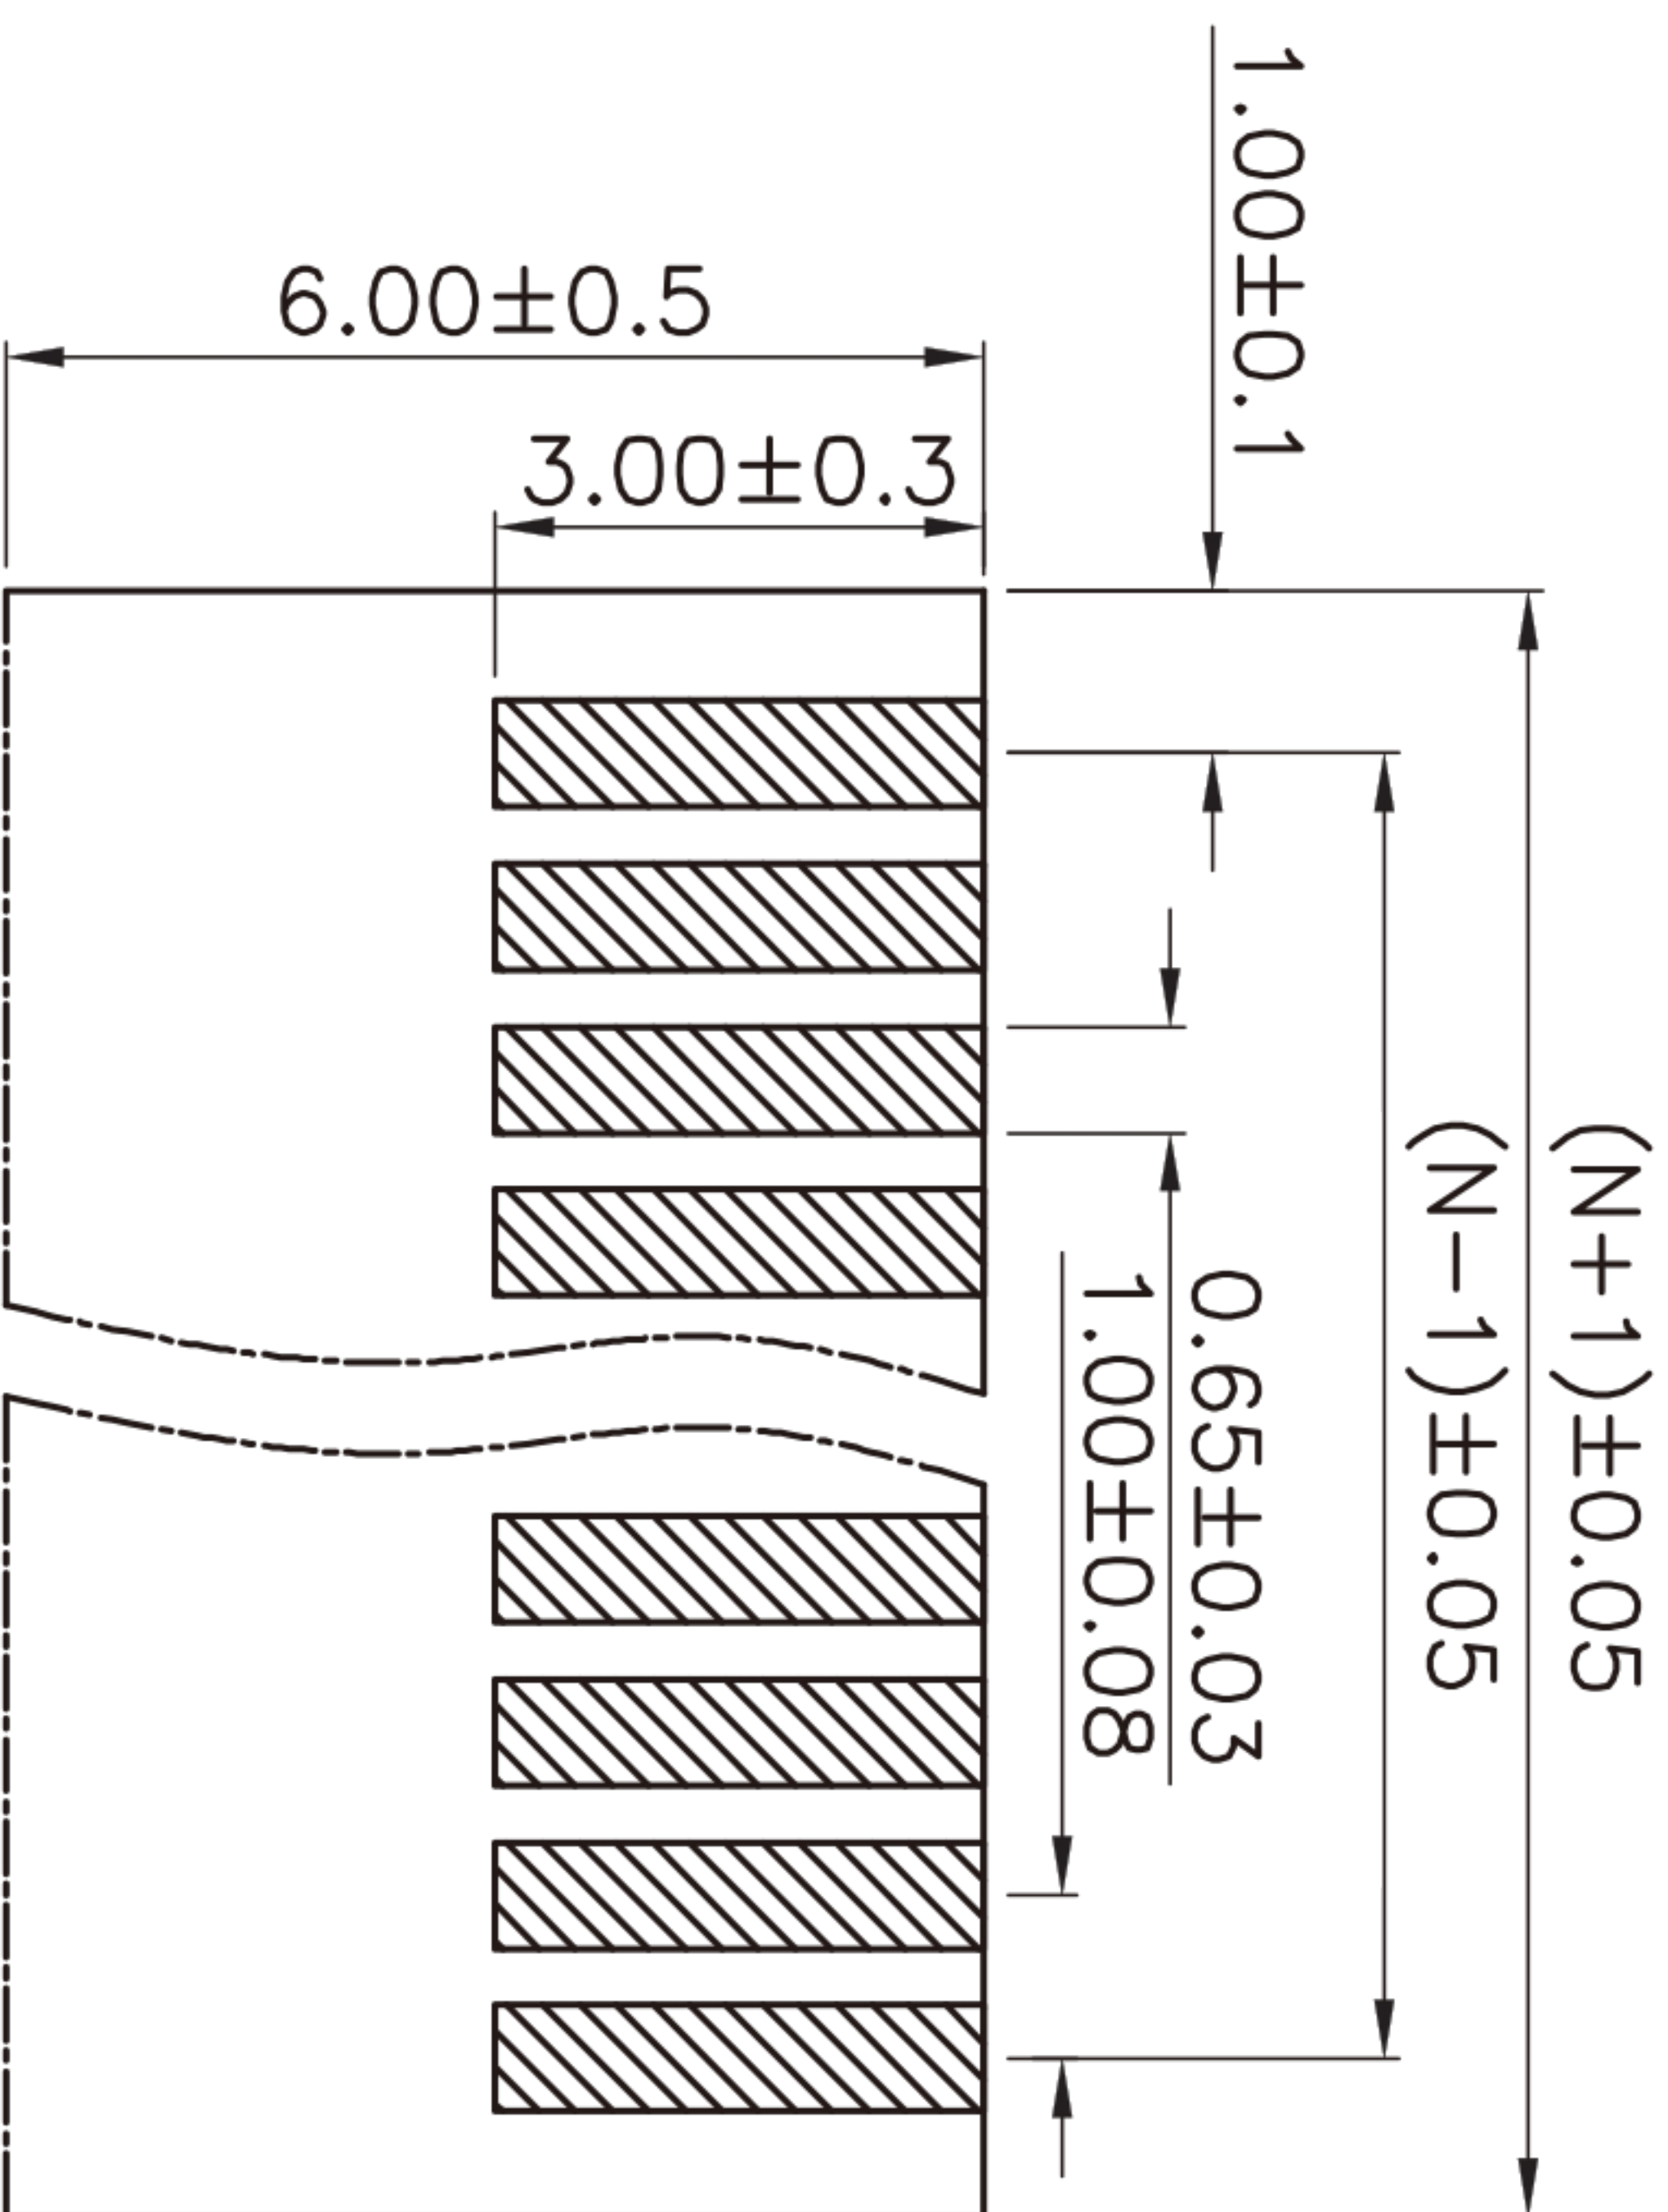



Electrical characteristics:  
 Current rating: 0.5A AC/DC  
 Voltage rating: 50V AC/DC  
 Temperature range: -25°C~+85°C  
 Withstand Voltage: 500V AC/Minute  
 Contact Resistance: ≤20mΩ  
 Insulation Resistance: ≥800mΩ

Material Description:  
 Contact: Phosphor Bronze  
 Tin—Leadplated  
 Housing: Thermoplastic(UL94V-0)

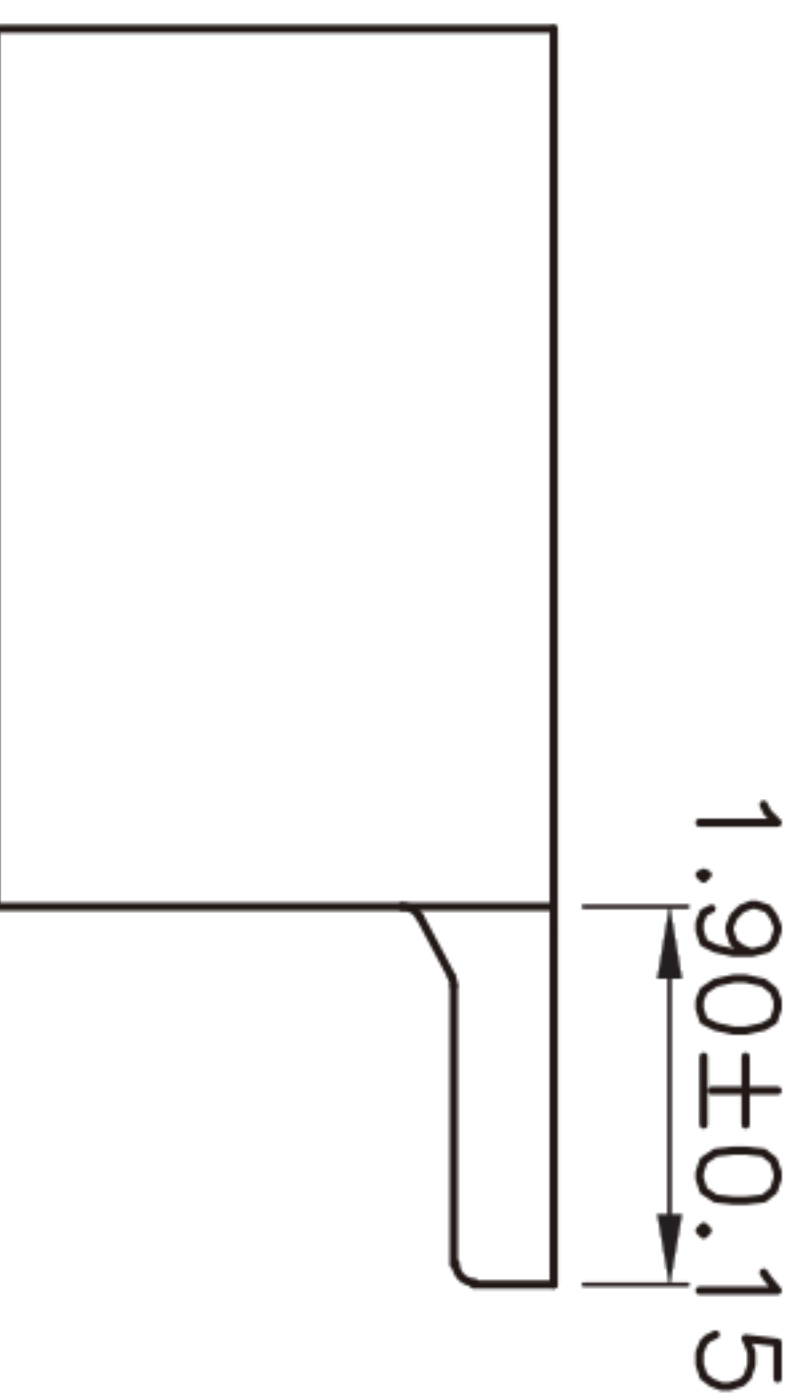

RECOMMENDED FFC/FPC DIM

PIN	DIM=A	DIM=B	DIM=C
30P	32.0	31.10	29.00
29P	31.0	30.10	28.00
28P	30.0	29.10	27.00
27P	29.0	28.10	26.00
26P	28.0	27.10	25.00
25P	27.0	26.10	24.00
24P	26.0	25.10	23.00
23P	25.0	24.10	22.00
22P	24.0	23.10	21.00
21P	23.0	22.10	20.00
20P	22.0	21.10	19.00
19P	21.0	20.10	18.00
18P	20.0	19.10	17.00
17P	19.0	18.10	16.00
16P	18.0	17.10	15.00
15P	17.0	16.10	14.00
14P	16.0	15.10	13.00
13P	15.0	14.10	12.00
12P	14.0	13.10	11.00
11P	13.0	12.10	10.00
10P	12.0	11.10	9.00
9P	11.0	10.10	8.00
8P	10.0	9.10	7.00
7P	9.0	8.10	6.00
6P	8.0	7.10	5.00
5P	7.0	6.10	4.00
4P	6.0	5.10	3.00

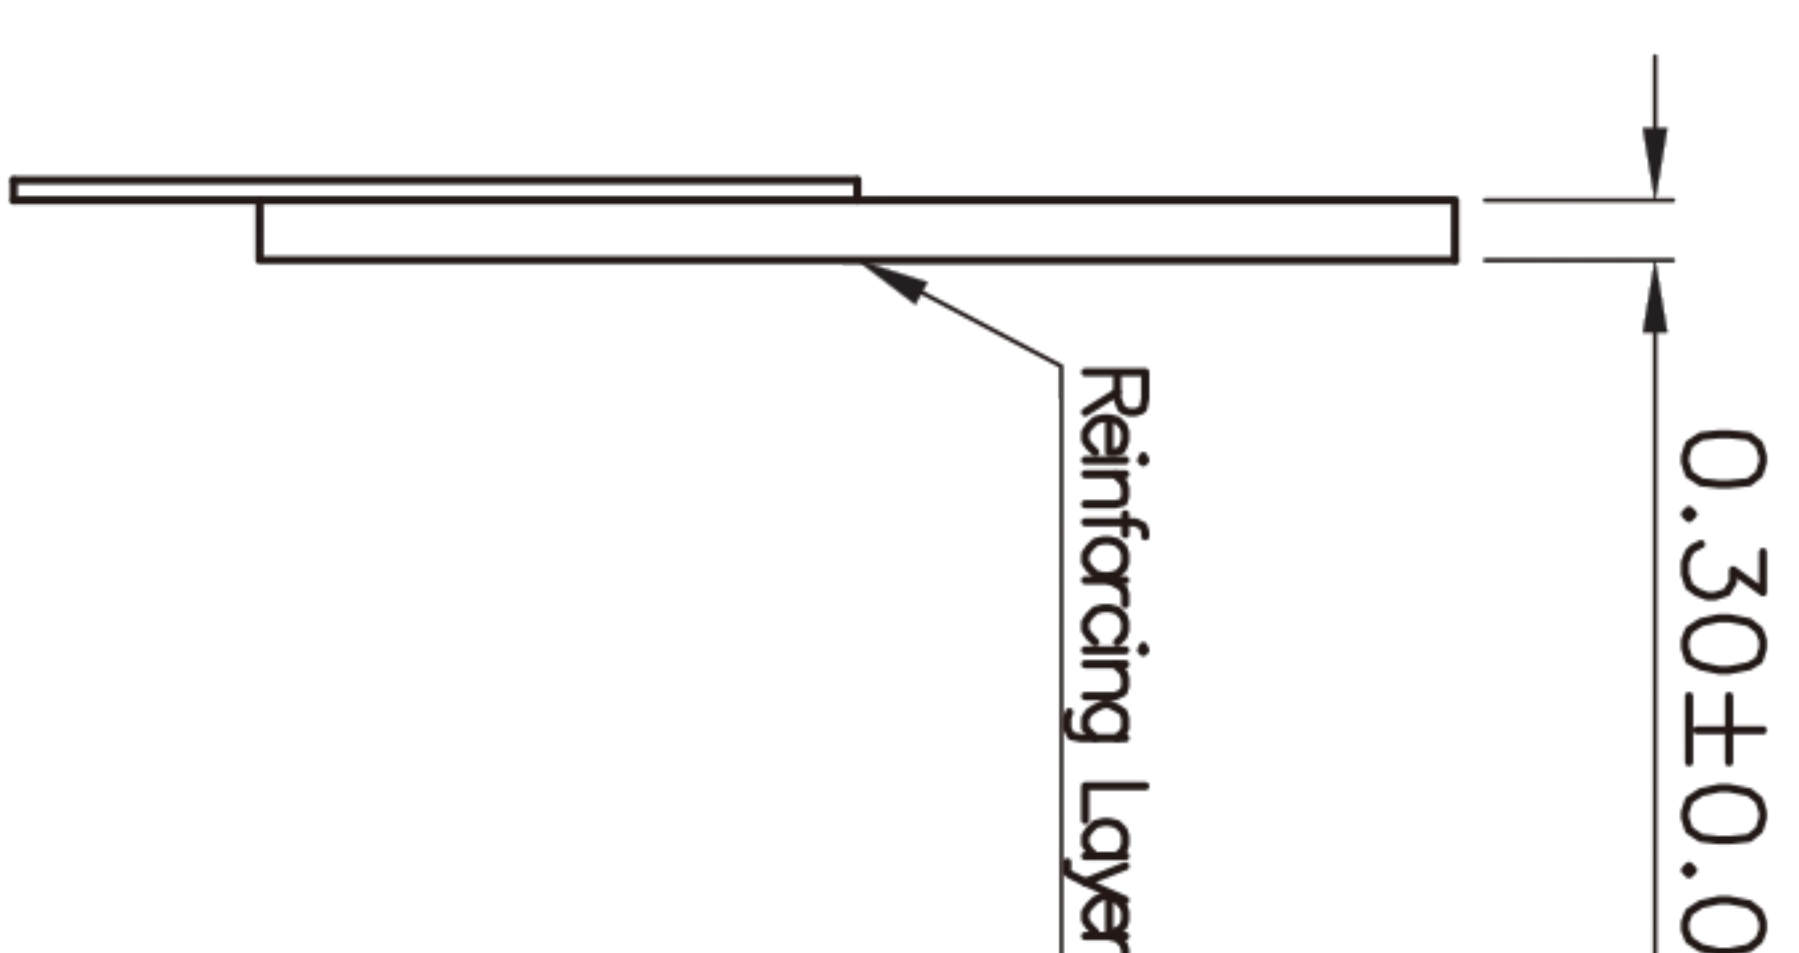

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	FPC 1.00mm Connector	
CHECKED				
APPROVALS				
TOLERANCES ARE			PART NO.	GP10-WSWN-XXP-G-N01
30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
10~30	±0.20			PROL.
5~10	±0.15	±2°	DRAWING NO.	
~ 5	±0.10			SHEET 1 OF 1

**深圳市联丰电子有限公司**  
 SHENZHEN LINFENGYING ELECTRONIC CO.,LTD