


SPECIFICATIONS
 Current Rating: 1Amps
 Insulator resistance: 500 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C TO +105°C
 Insulator Material: NY-6T
 Contact Material: Brass
 Plating: Gold flash

UNSPECIFIED TOLERANCE: ±0.20

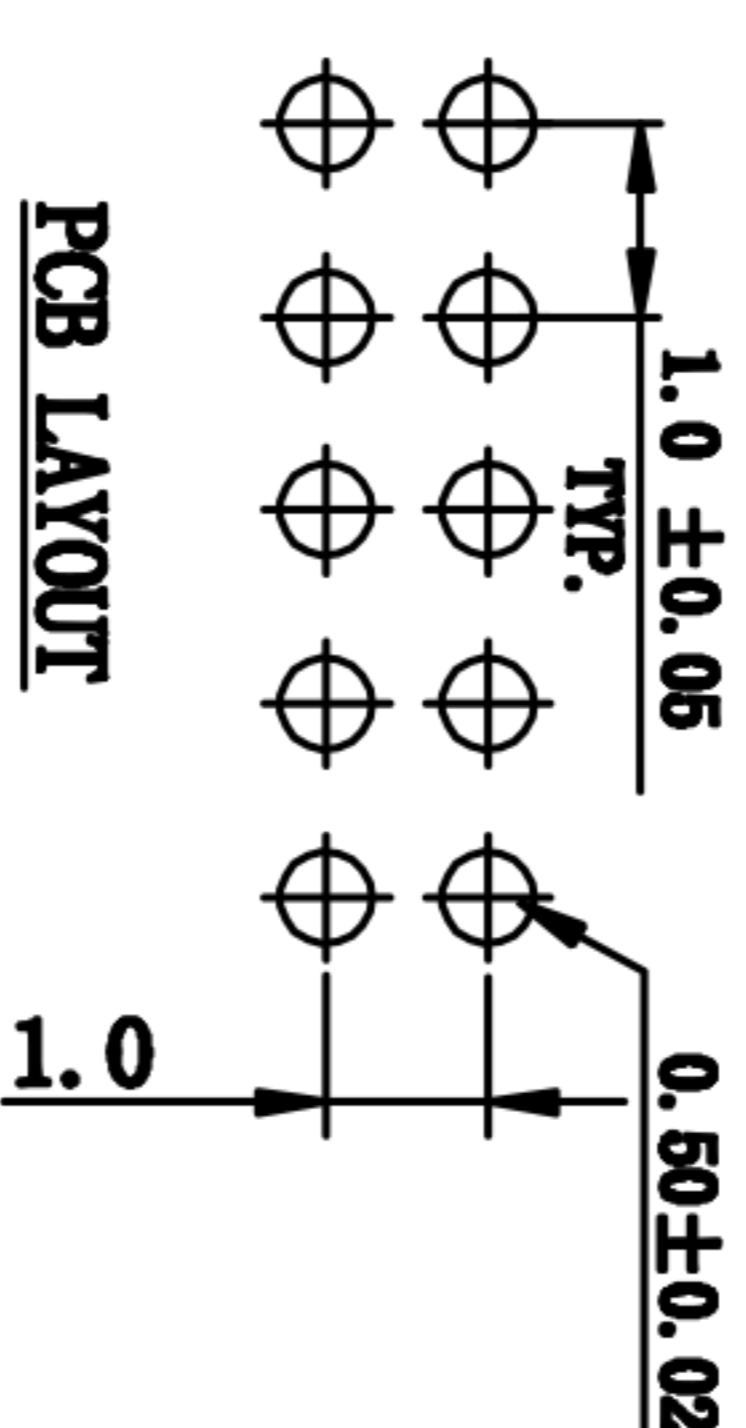

Plastic Base

Type	
H	2.0
PA	1.8
PB	3.0
PC	1.6

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:
DRAWN	ZHIWEI.CHEN	2015.07.07	PART NO. GP26-1010WR-2XNP
CHECKED			UNIT: mm SCALE: 1:1
APPROVALS			PROJ: SHEET 1 OF 1
TOLERANCES ARE		30~ ϕ LE ±0.30	ANGLE ±2°
		10~30 ±0.20	
		5~10 ±0.15	
		~ 5 ±0.10	

深圳市联丰电子有限公司
 SHENZHEN LIANFENG ELECTRONIC CO.,LTD