
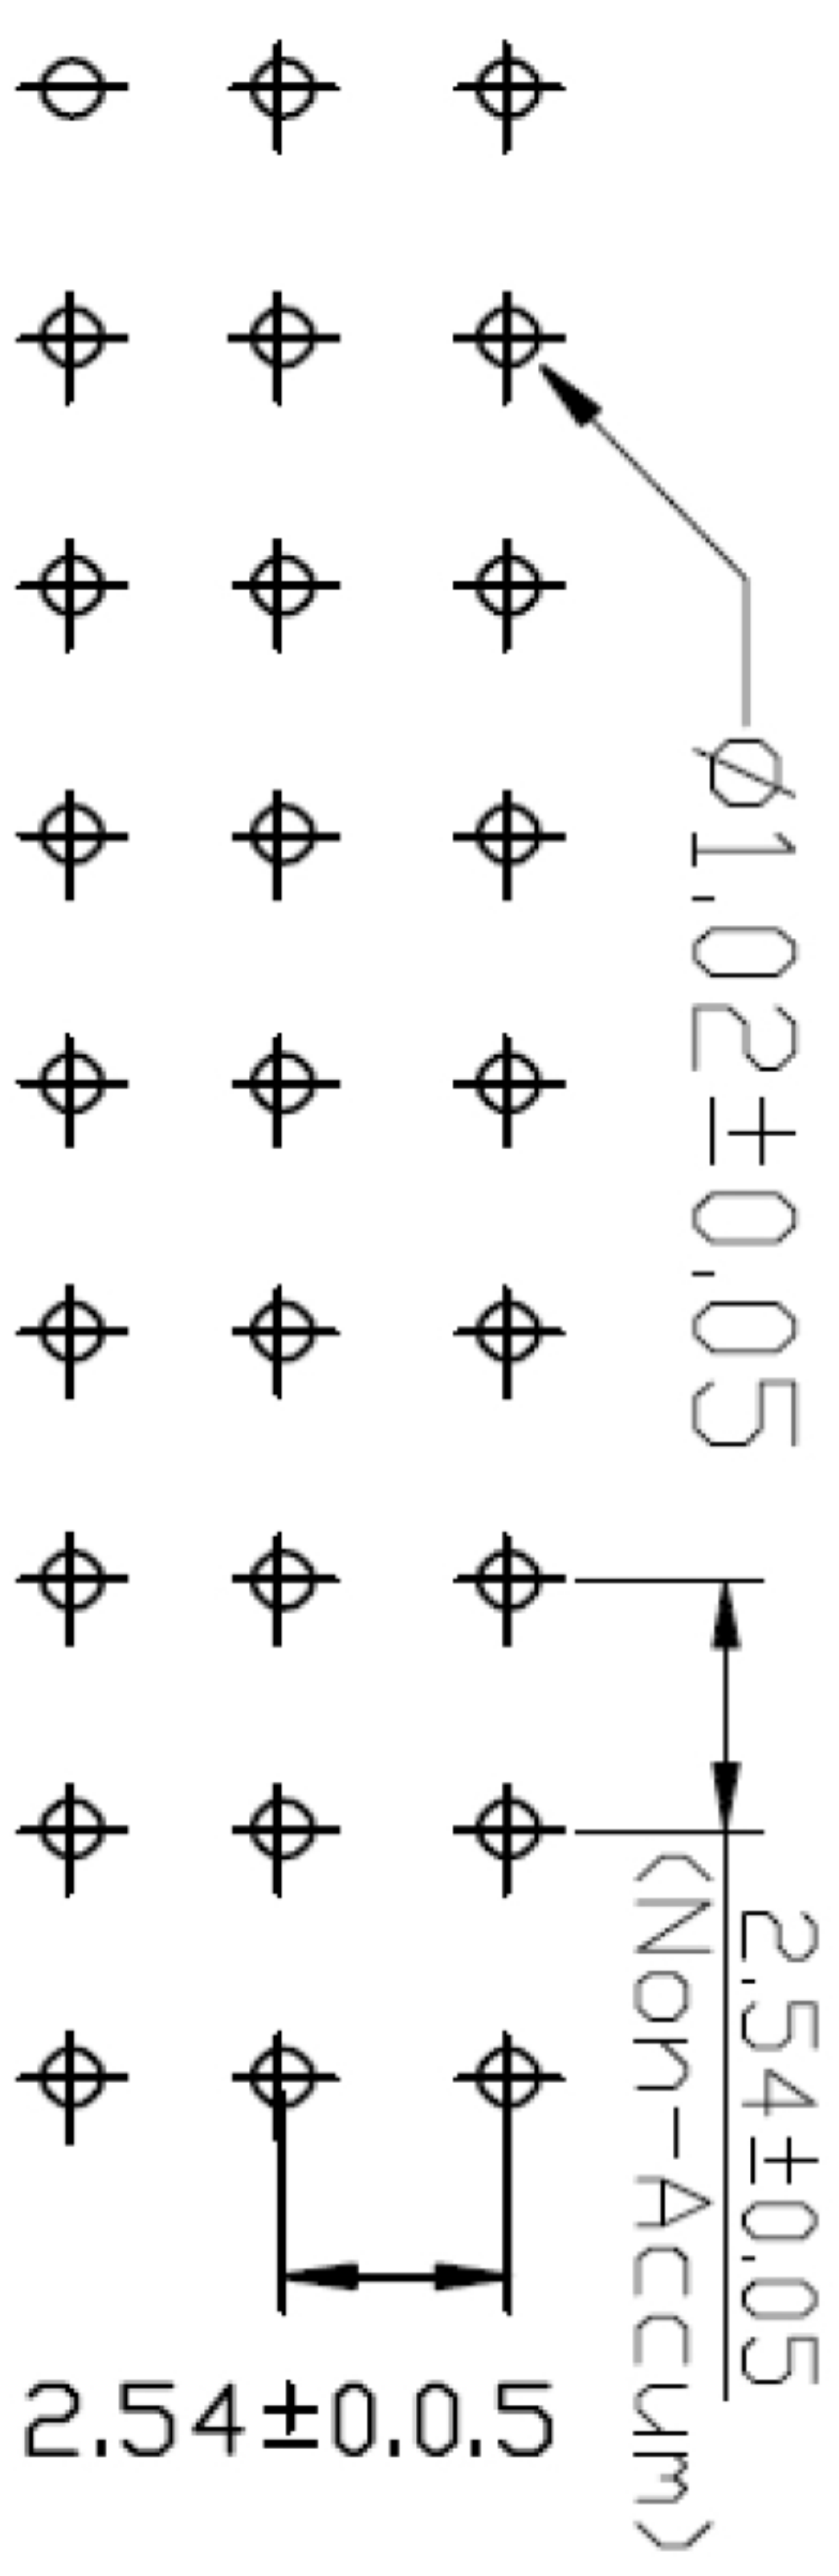


**SPECIFICATIONS**

- Current Rating: 2Amps
- Insulator Resistance: 5000Megohms min.
- Dielectric Withstanding: AC 500V
- Contact Material: Brass
- Operating Temperature: -40C +105
- Max Processing Temp: 230°TD 260°for 30-60 seconds
- Insulator Material: PA6T
- PLATING: GOLD FLASH
- UNSPECIFIED TOLERANCE: ±0.20

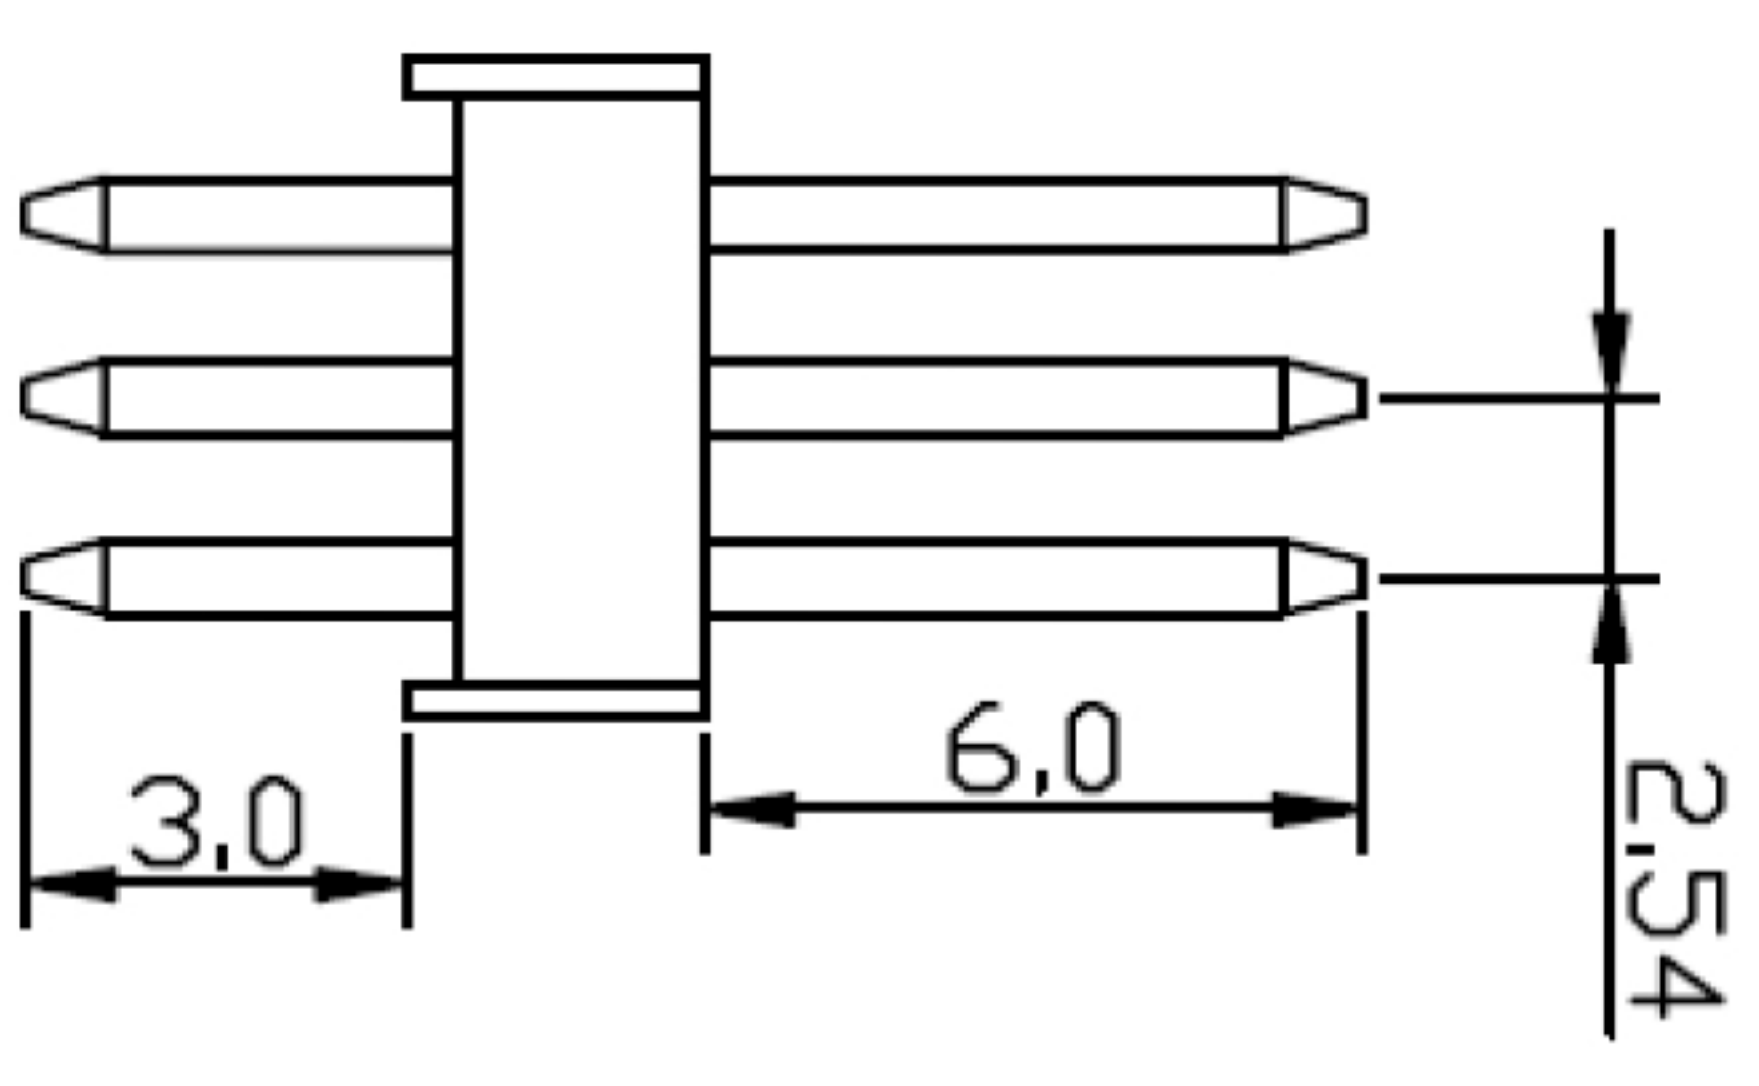

PCB Layout

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	GP26-2520WV-3XNP	
CHECKED			SCALE: 1:1	
APPROVALS			PROJ:	
TOLERANCES ARE		30~以上 ±0.30	ANGLE	DRAWING NO.
		10~30 ±0.20	±2°	
		5~10 ±0.15		SHEET 1 OF 1
		~ 5 ±0.10		
ECN NO.	REV.	DATE.	DESCRIPTION.	
	A		NEW	

**深圳市联丰电子有限公司**  
SHENZHEN LINFENG ELECTRONIC CO.,LTD