
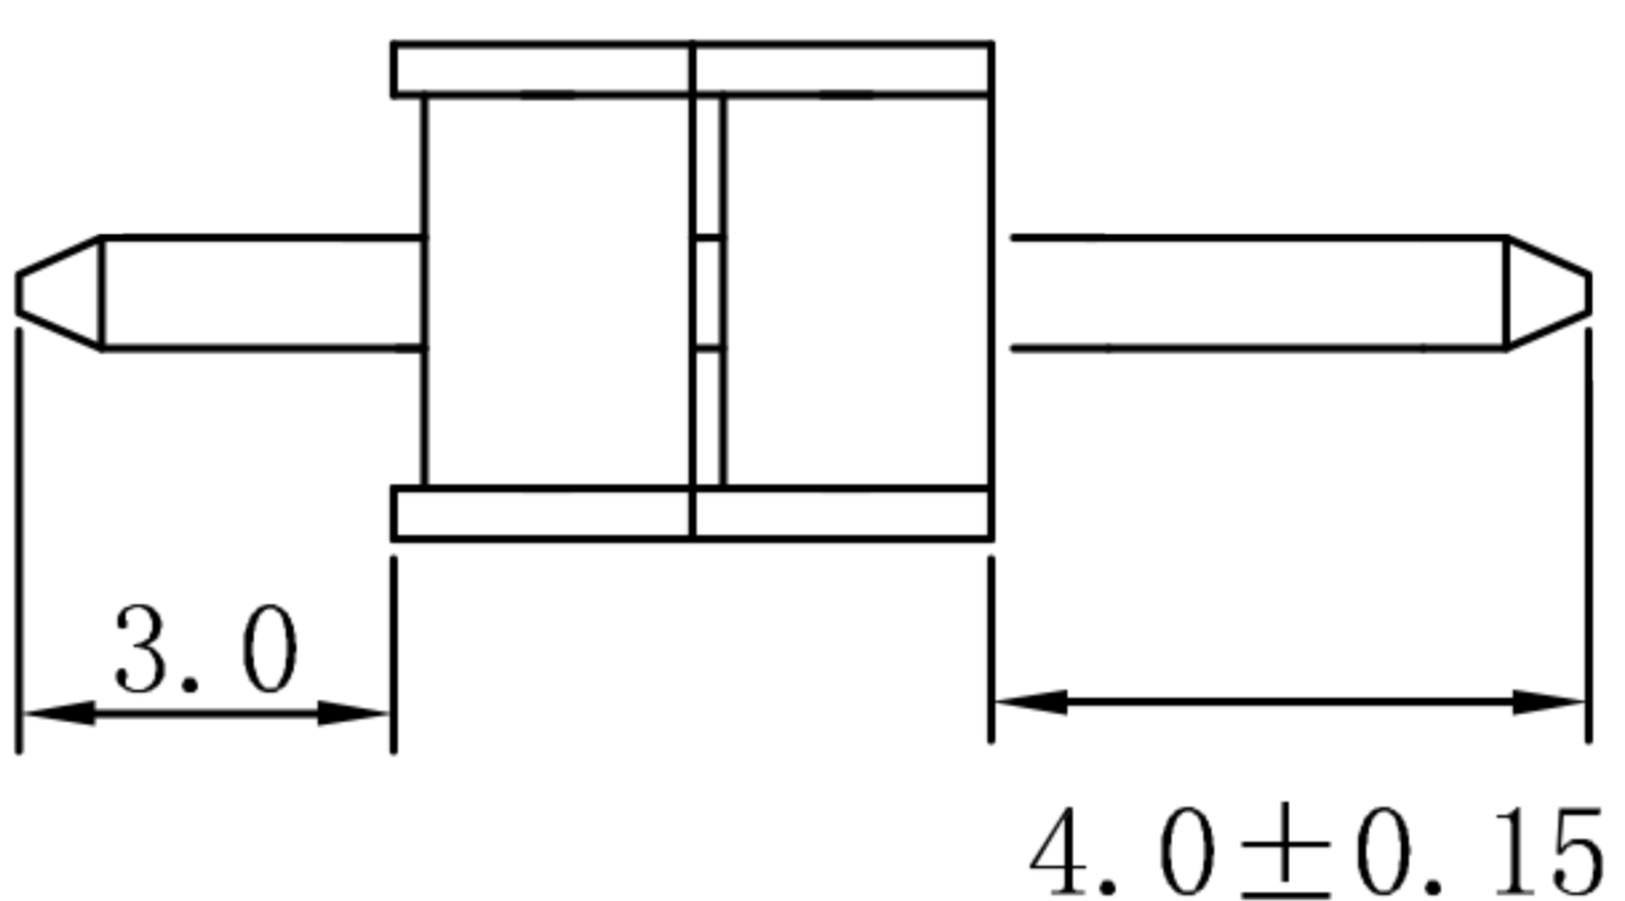


0.5 ± 0.02 Sq

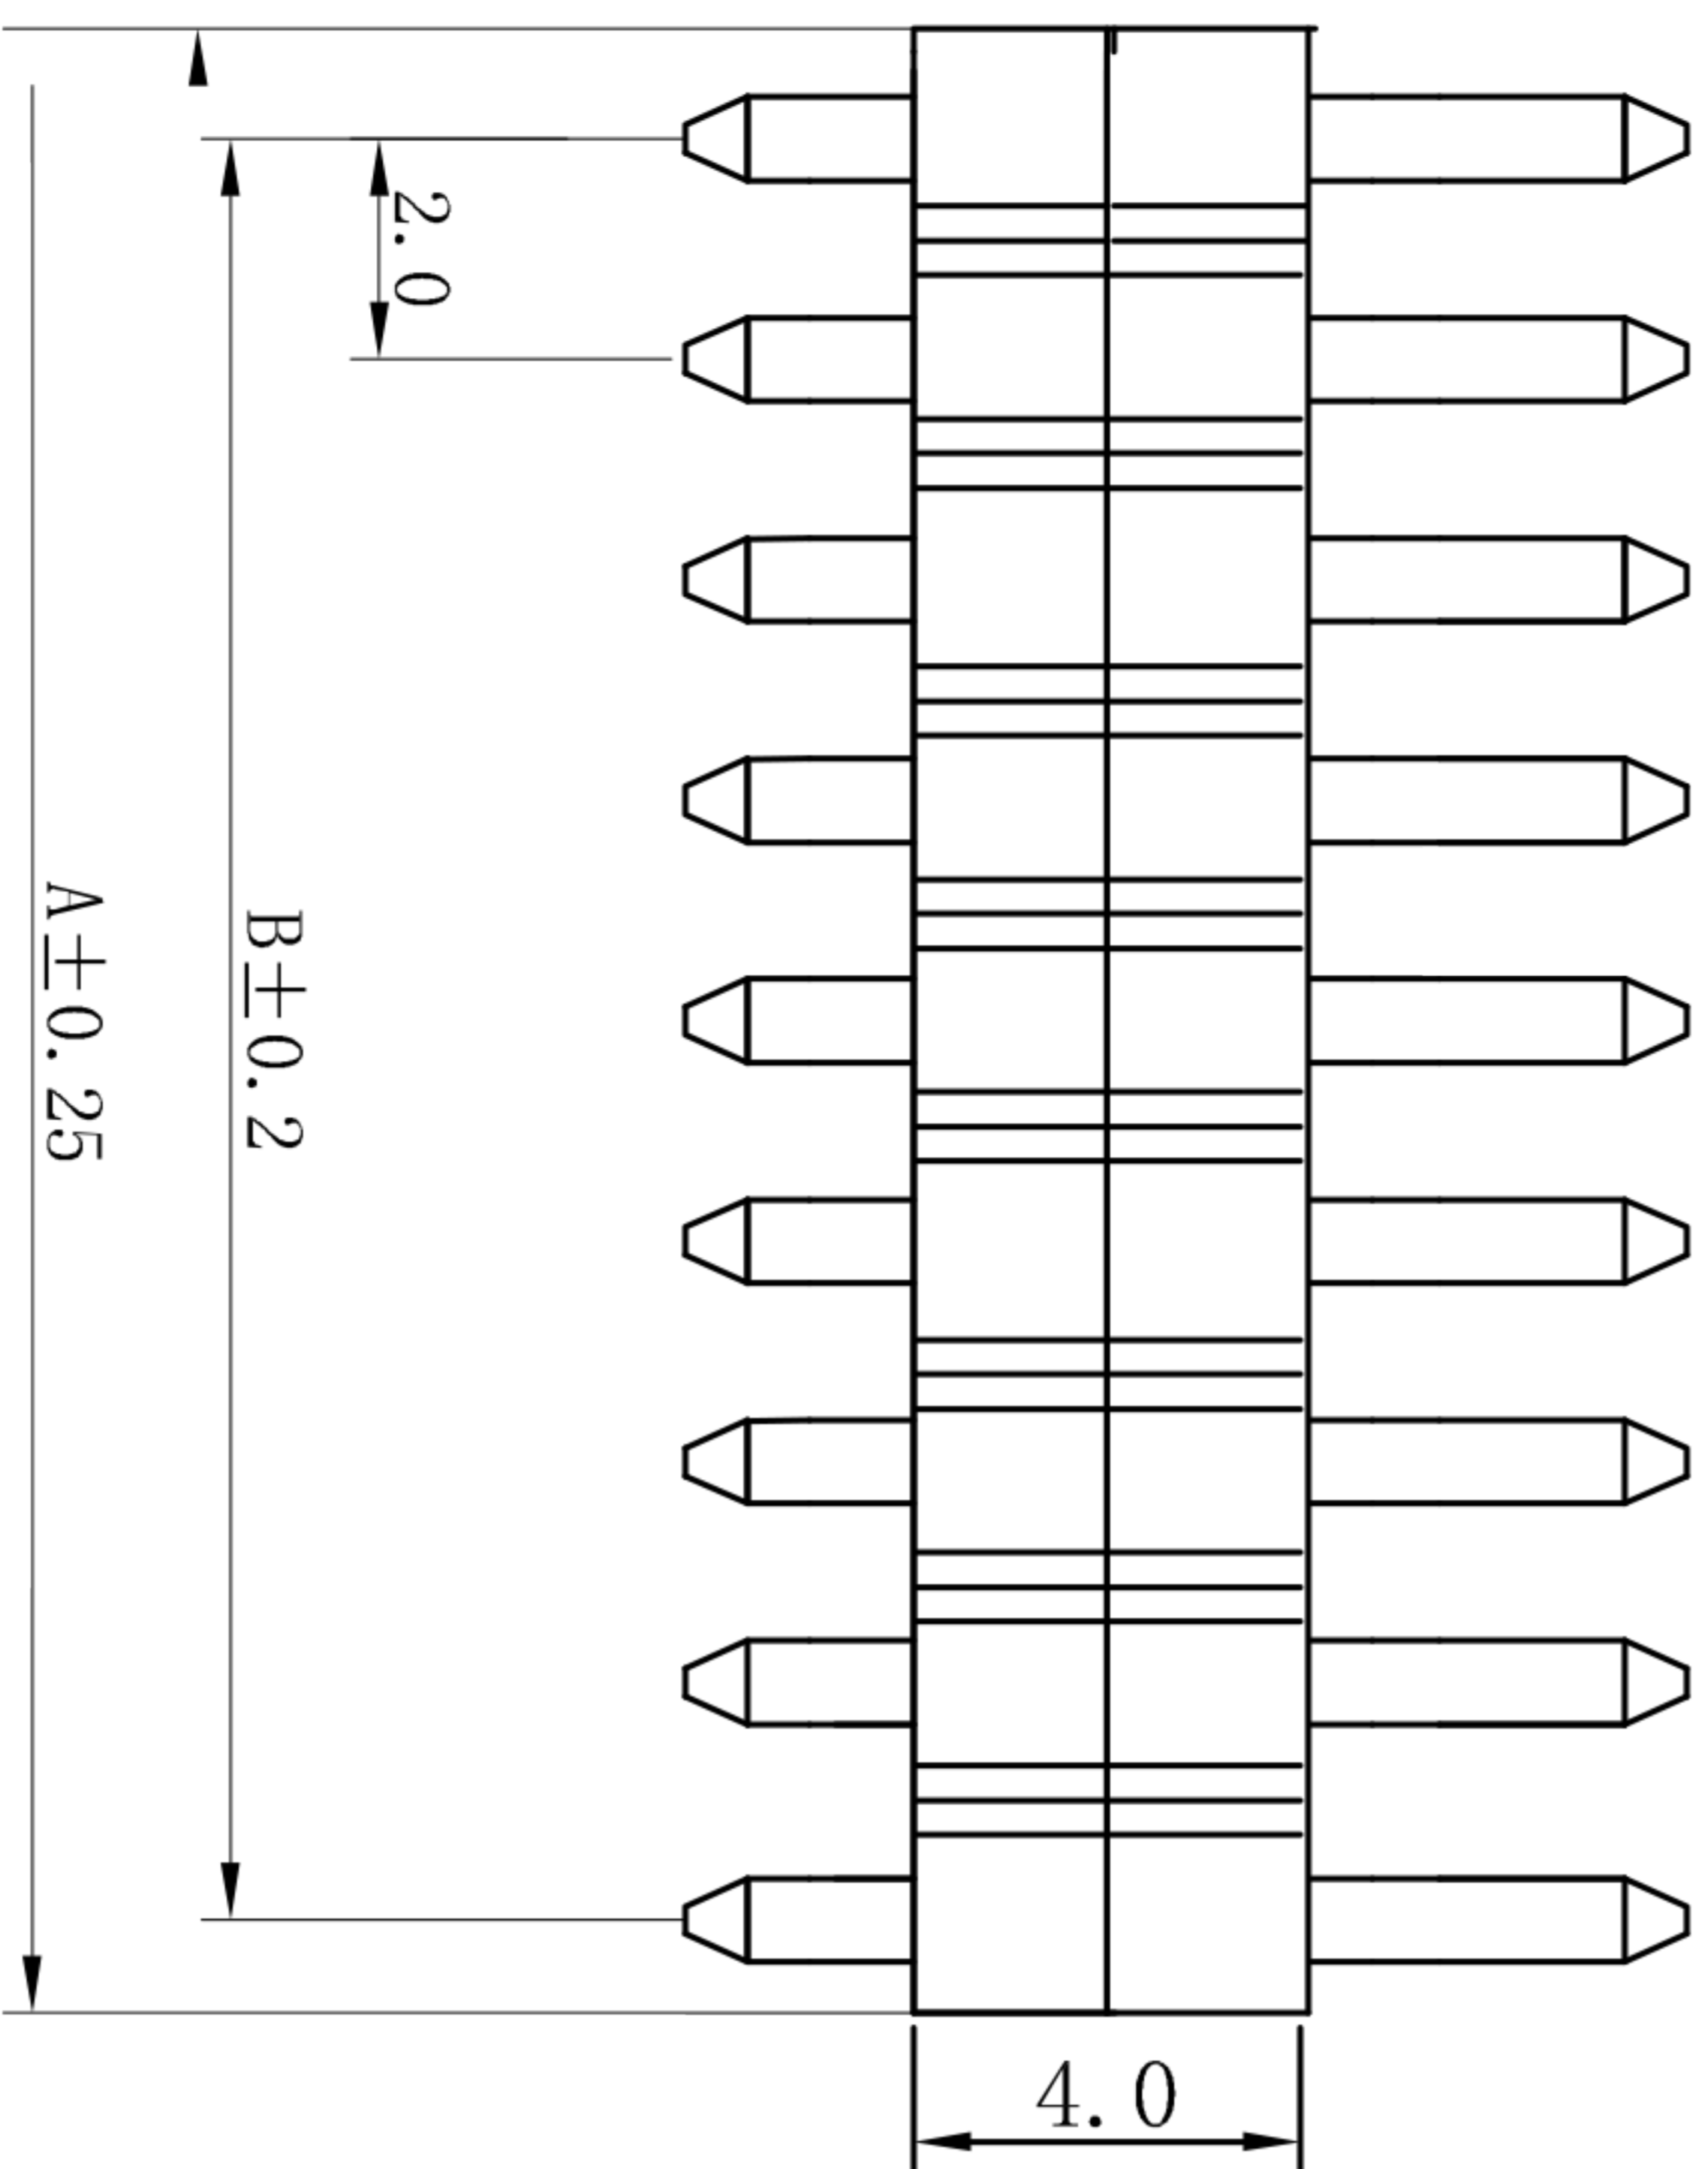


SPECIFICATIONS

Current Rating: 1Amps
 Insulator Resistance: 5000Megohms min.
 Dielectric Withstanding: AC 500v
 Contact Material: Brass
 Operating Temperature: -40 ° ~ +105°C
 Max Processing Temp: 230° TO 260° for 30-60 seconds
 Insulator Material: NYLON-6T
 PLATING: GOLD FLASH
UNSPECIFIED TOLERANCE: ± 0.20
 回流焊温度: 230-250° 。

Dimensions list

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	2.0	0	21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	8.0	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	52.0
8	16.0	14.0	28	56.0	54.0
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0

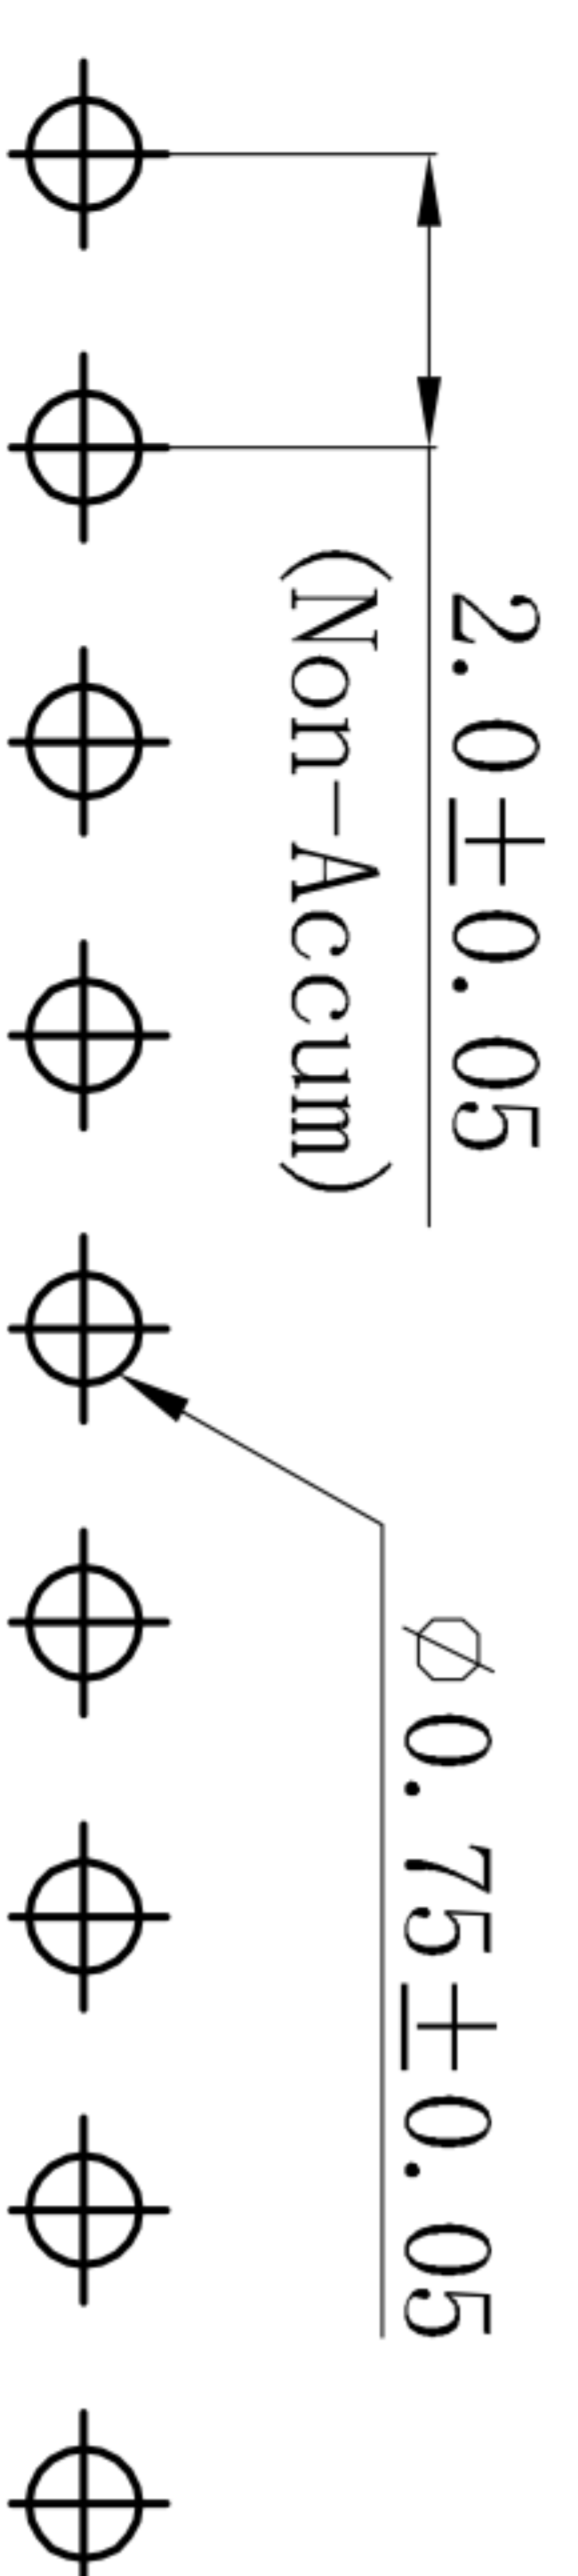

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	深圳市联丰电子有限公司		
DRAWN	ZHIWEI.CHEN	2015.07.07	SHENZHEN LINFENYING ELECTRONIC CO.,LTD		
CHECKED			TITLE:		
APPROVALS			PART NO.	GP26-2020WV-XP-1A	
TOLERANCES ARE		ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
30~以上	±0.30				
10~30	±0.20	±2°			
5~10	±0.15		DRAWING NO.		SHEET 1 OF 1
~ 5	±0.10				