

1. MATERIALS AND FINISH

1.1 HOUSING MATERIALS:

PA6T

1.2 CONTACTS:

Brass

1.3 PLATING:

PLATING GOLD OVERALL

UNDERPLATING NICKEL

2. SPECIFICATIONS

2.1 CURRENT RATING:

1AMP. MAX

2.2 INSULATION RESISTANCE:




1000M Ω MIN AT 500V DC

2.3 DIELECTRIC WITHSTANDING VOLTAGE:

500V (r. m. s) AC FOR 1 MINUTE.

2.4 OPERATING TEMPERATURE:

-40° C TO +85 ϕ .

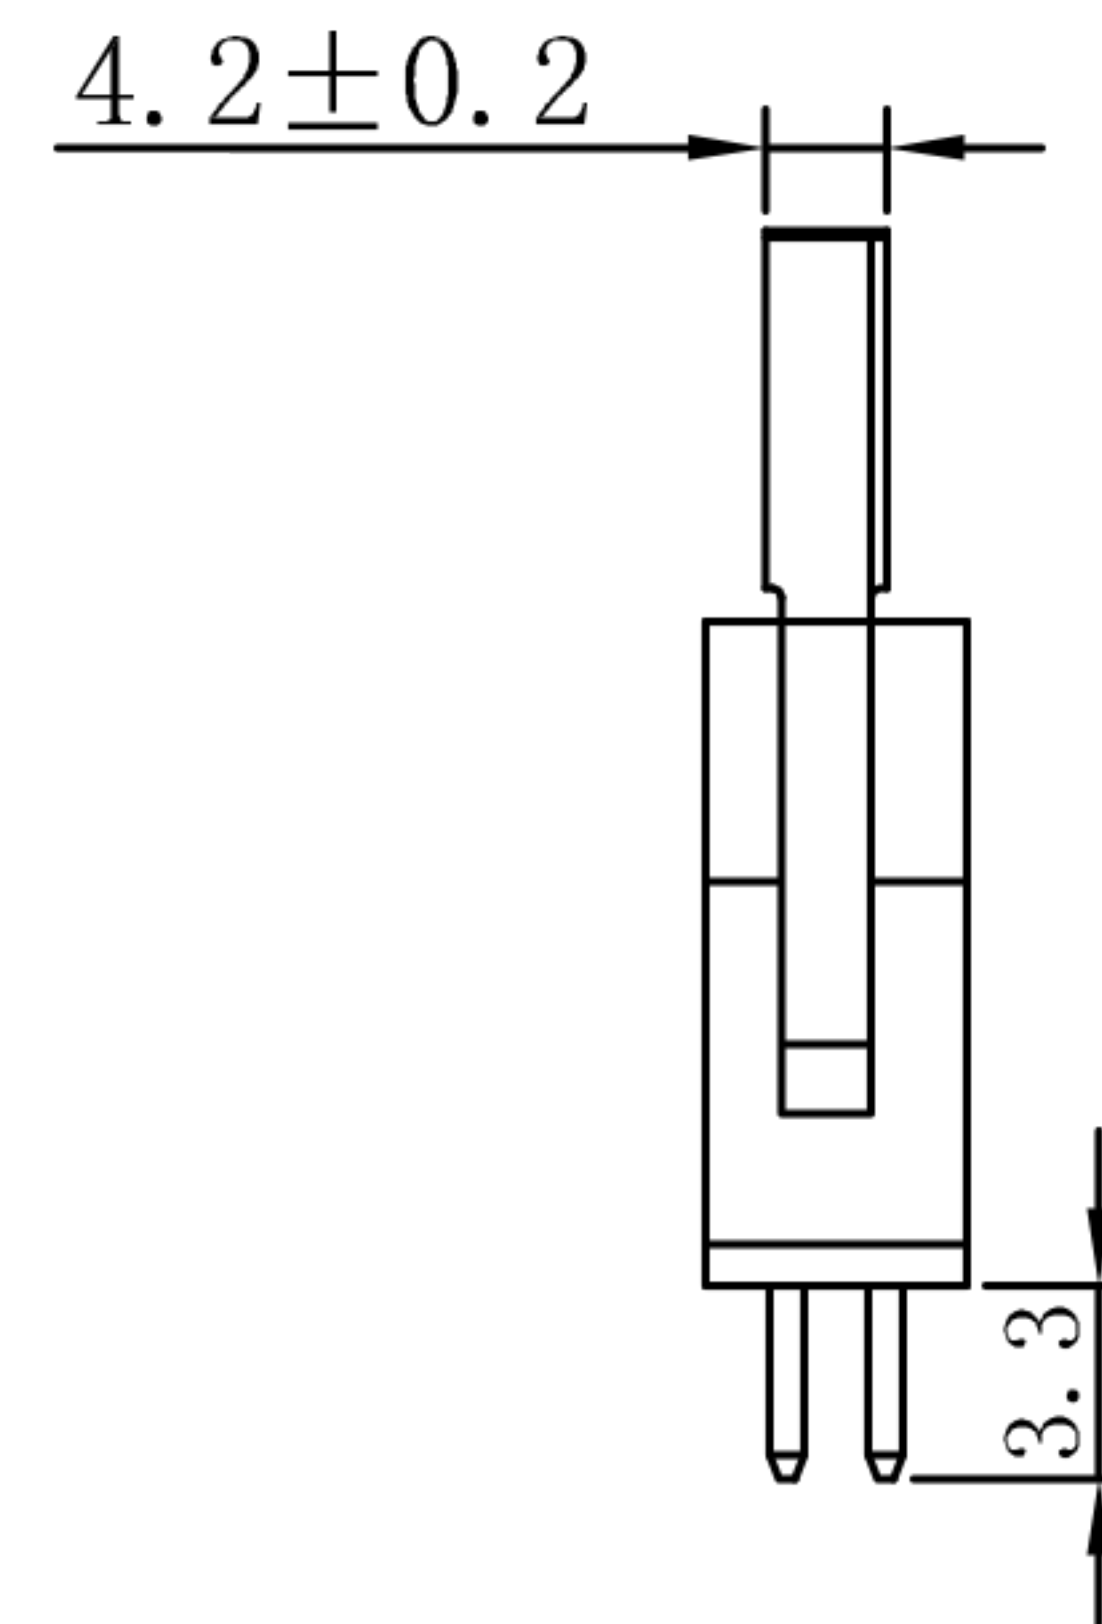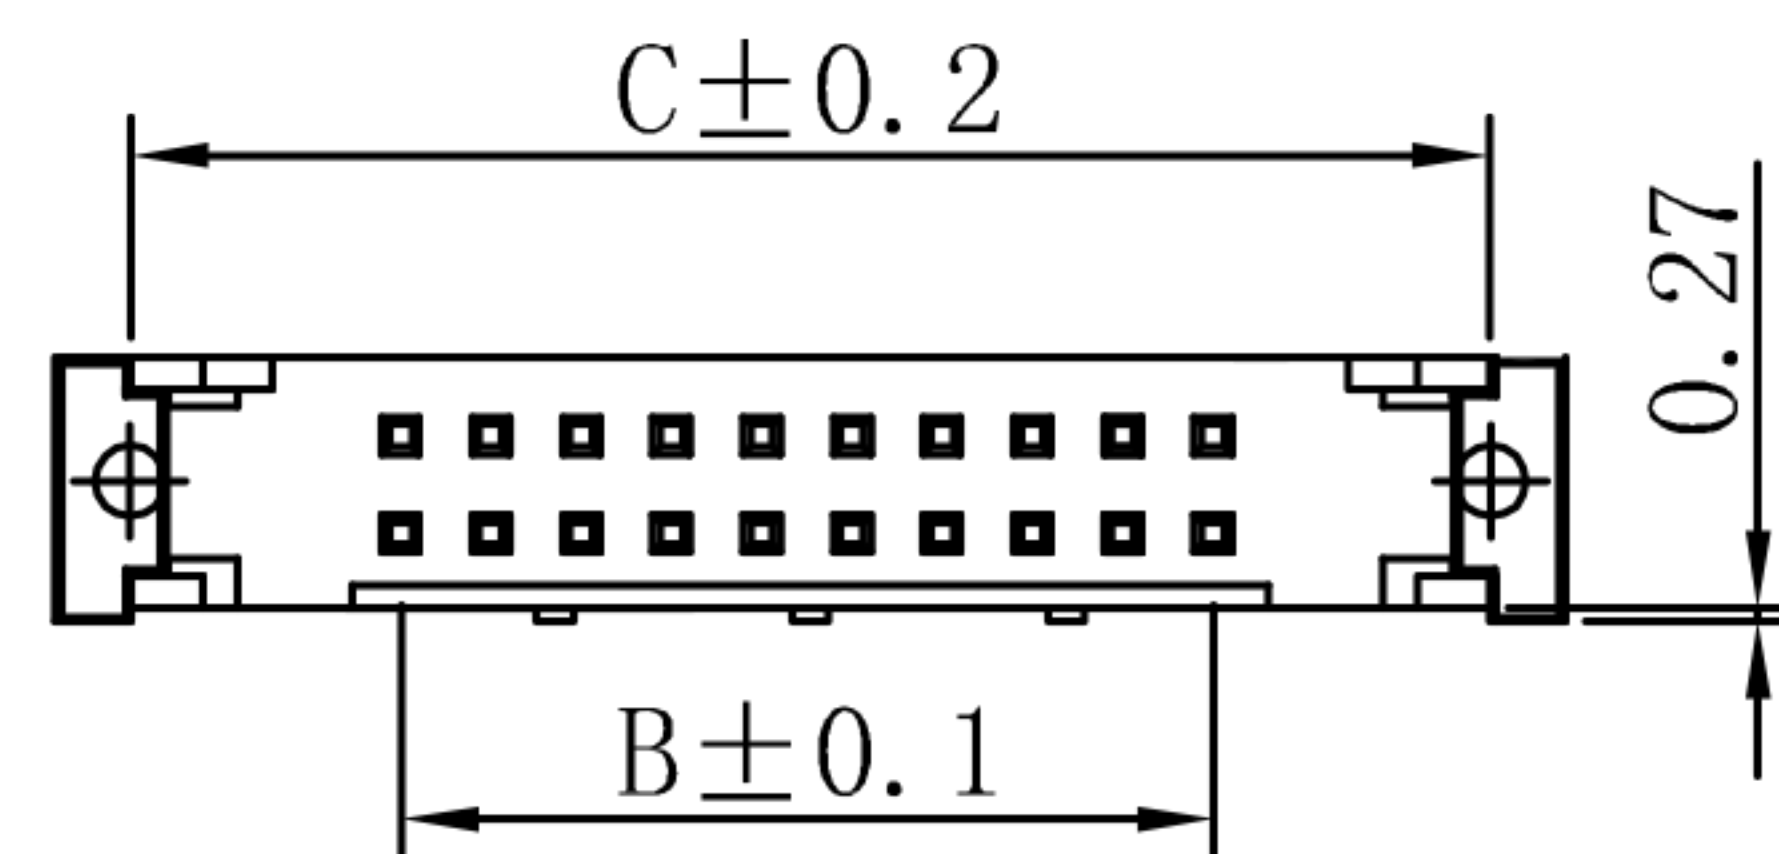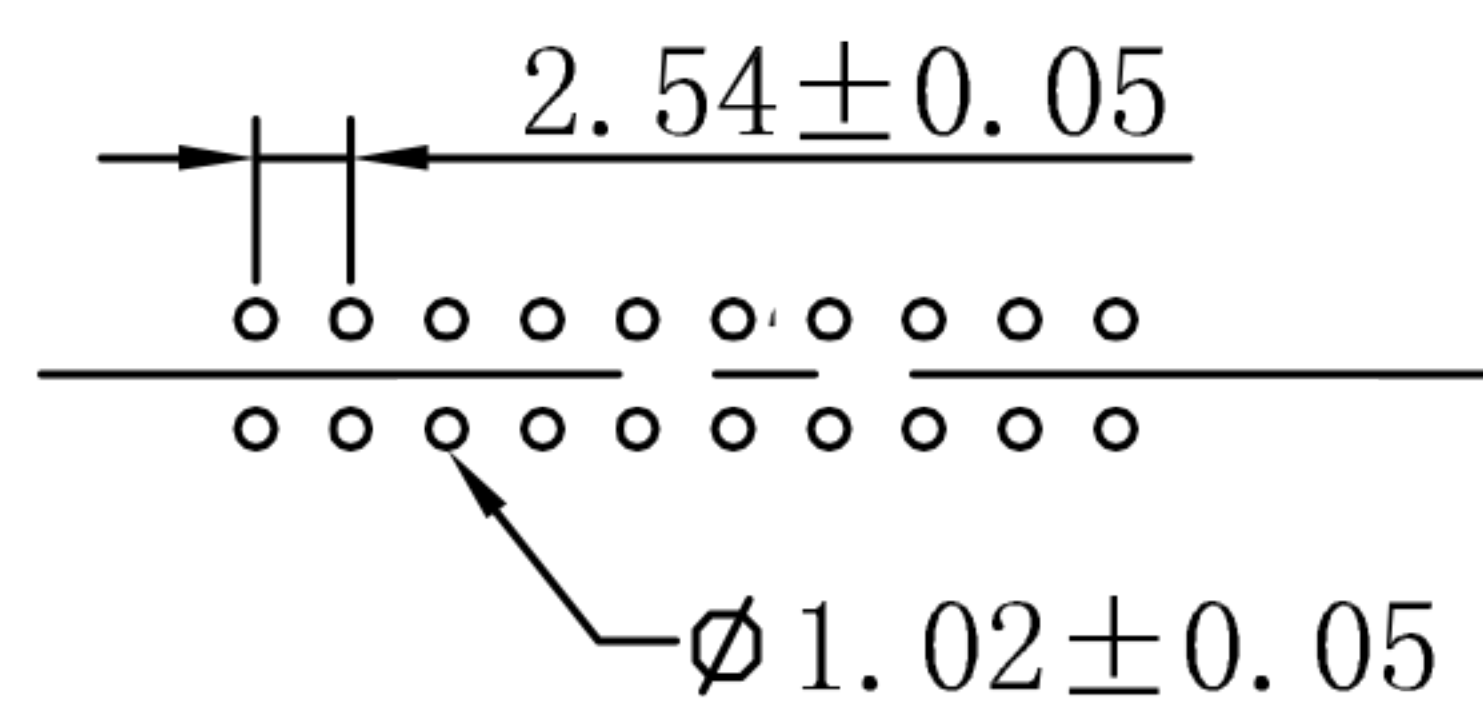

| NUMBER OF POSITION | Dimensions | | |
|--------------------|------------|-------|-------|
| | A | B | C |
| 10 | 32.00 | 10.16 | 27.94 |
| 14 | 37.08 | 15.24 | 33.02 |
| 16 | 39.62 | 17.78 | 35.56 |
| 20 | 44.70 | 22.86 | 40.94 |
| 24 | 49.78 | 27.94 | 45.72 |
| 26 | 52.32 | 30.48 | 48.26 |
| 30 | 57.40 | 35.56 | 53.34 |
| 34 | 62.48 | 40.64 | 58.42 |
| 40 | 70.10 | 48.26 | 66.04 |
| 50 | 82.80 | 60.96 | 78.74 |
| 60 | 95.50 | 73.66 | 91.44 |
| 64 | 100.58 | 78.74 | 96.72 |

| APPROVALS | | DATE | 深圳市联丰盈电子有限公司 SHENZHEN LINFENGYING ELECTRONIC CO.,LTD | | | |
|---|-------------|------------|---|--------------------------|--------------|-------|
| DRAWN | ZHIWEI.CHEN | 2015.07.07 | | | | |
| CHECKED | | | TITLE: | HEADER PH2.54mm DIP 180度 | | |
| APPROVALS | | | PART NO. | GP24-2523WV-2xNP | | |
| TOLERANCES ARE | 30~以上 | ± 0.30 | ANGLE | UNIT: mm | SCALE: 1:1 | PROJ: |
| | 10~30 | ± 0.20 | | | | |
| | 5~10 | ± 0.15 | | | | |
| | ~ 5 | ± 0.10 | | | | |
| ECN NO. REV. DATE. NEW DESCRIPTION. CHANGE. CHECK. APPRO. | | | DRAWING NO. | | SHEET 1 OF 1 | |